


# Glazing Tape Applicators

## Lamination

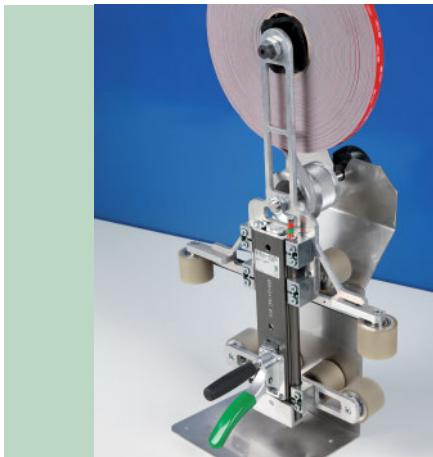

### 3M SGA 200 Hand Laminator

- maximum tape width: 25 mm (adjustable)
- panel height: from 6 up to 125 mm (adjustable)
- application and working direction from left to right




Picture: 3M SGA 400R-2000 Linear Laminator

### 3M SGA 400R/L-xxxx Linear Laminator

- maximum tape width: 25 mm (adjustable)
- panel height: from 5 up to 45 mm (adjustable)
- R: application and working direction from left to right
- L: application and working direction from right to left

xxxx = max. panel width

- 2000: fits for panels of max. 2000 mm in width
- 3000: fits for panels of max. 3000 mm in width
- 4000: fits for panels of max. 4000 mm in width

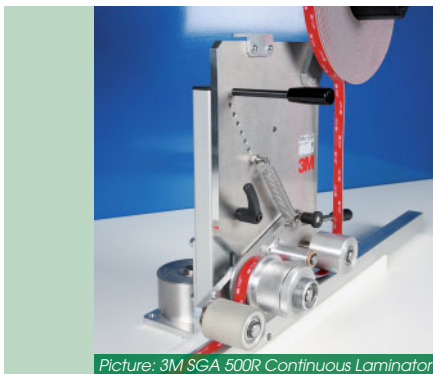

Picture: 3M SGA 500R Continuous Laminator

### 3M SGA 500R/L Continuous Laminator

- maximum tape width: 25 mm (adjustable)
- height adjustable
- R: application direction from left to right, working direction from right to left
- L: application direction from right to left, working direction from left to right

Remark: Special solutions are available on request.

**Vulkan**  
Technic


# Glazing Tape Applicators

## Pressing



### 3M SGA 300 Hand Presser

- for pressing of panel and frame
- maximum total height: 130 mm
- working direction: from left to right
  
- maximum pressure: 400 N
- standard range of pressure: 0 - 40 mm (measured from the edge)

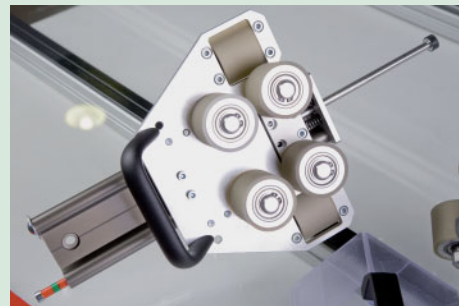

### 3M SGA 600 Roller-Pressing Device

- for pressing of already bonded units (panel & frame)
- standard working width: 1500 mm
- standard working height: 200 mm (adjustable)

Remark: Special solutions are available on request.

**Vulkan**  
Technic

Phone +49 (0) 6593 - 998 - 0  
Fax +49 (0) 6593 - 998 - 100  
info@vulkantechinc.de  
www.vulkantechinc.de

Place of Business: Wiesbaum/Germany  
HRB 12145  
Local Court of Wittlich

Maschinen-Konstruktions GmbH  
Vulkanstrasse 1 54578 Wiesbaum/Germany

# Glazing Tape Applicators


## Accessories



Picture: Internal mitre cut


### 3M SGA 100 Mitre Guide

- maximum tape width: 25 mm
- for internal mitre cuts, external mitre cuts and rectangular cuts

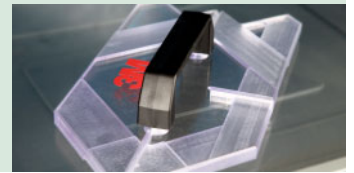

### 3M SGA 110 Scissors

- for cutting of adhesive tape after application

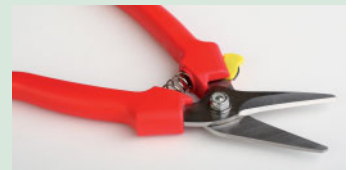

### 3M SGA 120 Cutter

- for exact cutting of adhesive tape and for mitre cuts



### 3M SGA 130 Hand Roller

- for manual pressing of the adhesive tape, e.g. after mitre cut



Remark: Special solutions are available on request.

**Vulkan**  
Technic